

200W PSM - PLUG AND PLAY

- For S-Band Pulsed Radar Application

200 Watts - 200 μ s, 10%, 36V
 S-Band Pulsed Radar 2700 - 3100 MHz

- Easy To Use – 50 Ω Plug-and-Play
- Reduce Design Cycle Time
- Improve System Performance
- Reduce System Size and Components

GENERAL DESCRIPTION

The 2731-200P is a 50 ohm matched Power Solution Module (PSM) for S-Band pulsed Radar systems capable of providing 200 Watts of pulsed RF output power at two hundreds microsecond pulse width ten percent duty factor across the band 2700-3100 MHz. This PSM is designed with plug and play concept which extremely user friendly and requires no additional tuning and impedance matching from the customer. Mechanical Size is 2" x 1.41" x 0.21"


ELECTRICAL CHARACTERISTICS @ 25 °C, Pulse Width=200us, 10%

Symbol	Characteristics	Test Conditions	Min	Typ	Max	Units
P _{in}	Input Power	V _{cc} =36V, P _{out} =200W, Freq=2.7 to 3.1 GHz	27.0	32.0	35.6	W
G _p	Power Gain	V _{cc} =36V, P _{out} =200W, Freq=2.7 to 3.1 GHz	7.5	8.0	8.7	dB
η_c	Collector Efficiency	V _{cc} =36V, P _{out} =200W, Freq=2.7 to 3.1 GHz	40	45		%
Droop	Pulse Droop	V _{cc} =36V, P _{out} =200W, Freq=2.7 to 3.1 GHz		0.2	0.6	dB
R/L	Input Return Loss	V _{cc} =36V, P _{out} =200W, Freq=2.7 to 3.1 GHz	7			dB
VSWR-T	Load Mismatch Tolerance	V _{cc} =36V, P _{out} =200W, Freq=2.7 to 3.1 GHz			2:1	
Θ_{jc}	Thermal Resistance	Pulse Width=200uS, Duty=10%			0.30	°C/W


Typical Test Data:

Frequency	P _{out} (W)	P _{in} (W)	I _c (I)	RL (dB)	N _c (%)	G (dB)
2700 MHz	200	30.2	1.25	-9	44	8.2
2900 MHz	200	33.1	1.22	-10	45	8.0
3100 MHz	200	33.2	1.25	-16	44	7.8

Typical RF Performance Curves

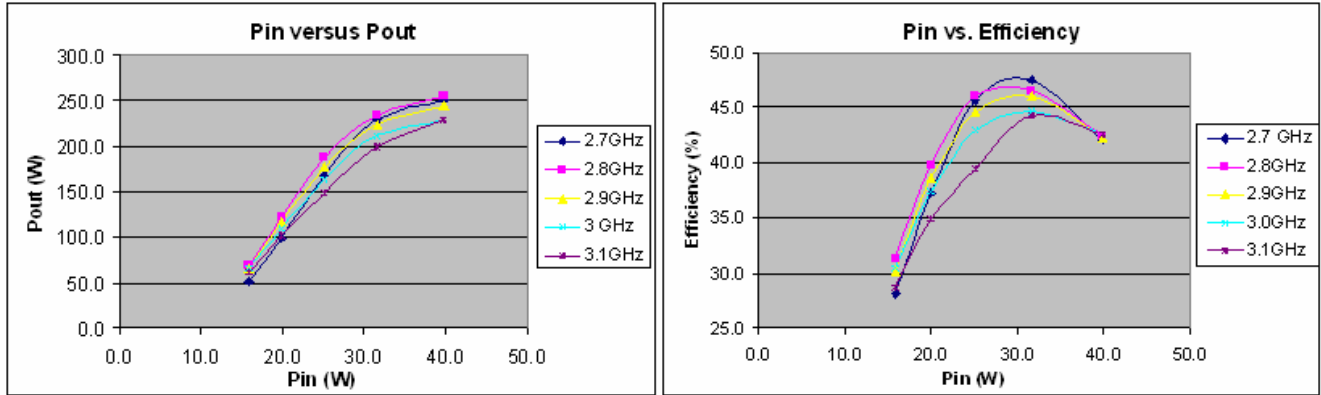

2731-200P PSM Outline Drawing

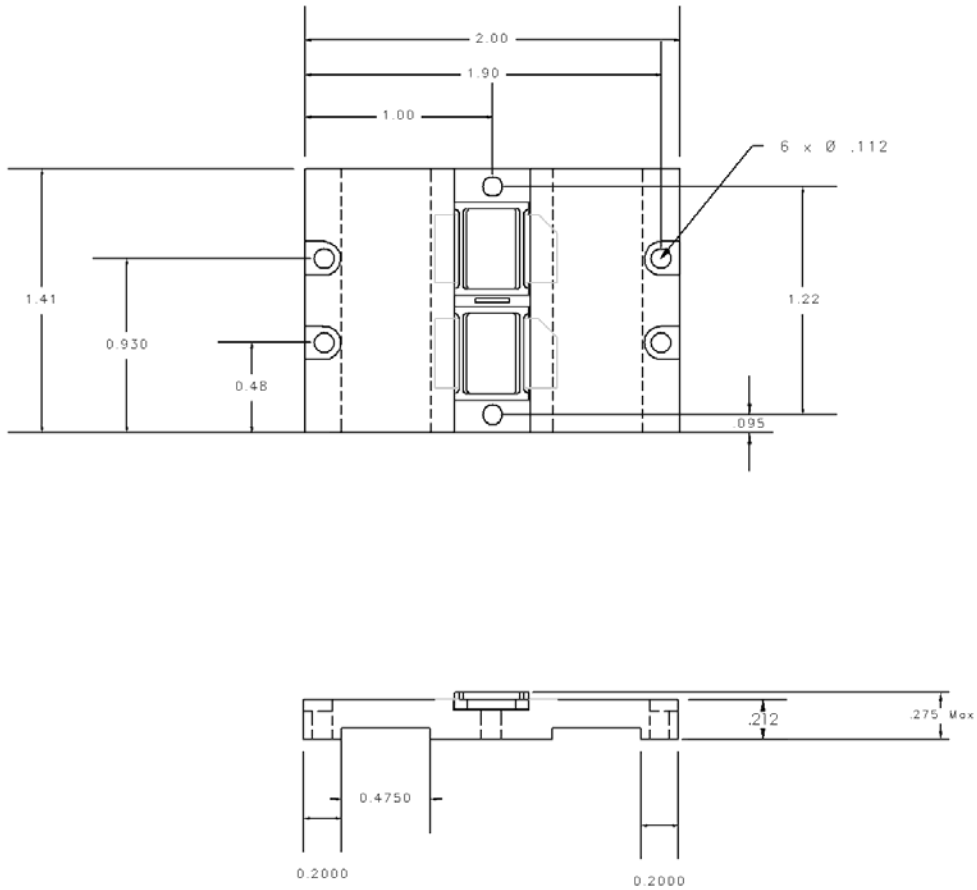

Microsemi reserves the right to change, without notice, the specifications and information contained herein. To verify the current version please check our website at www.microsemi.com, email to psm@microsemi.com, or contact our factory direct. Microsemi PPGR 3295 Scott Blvd, Suite 150, Santa Clara, CA 95054 Tel. 408-986-8031