
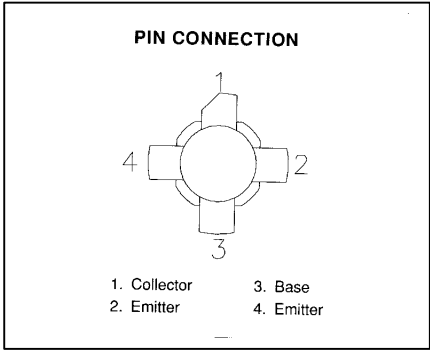


MS1008

**RF & MICROWAVE TRANSISTORS
HF SSB APPLICATIONS**

Features

- 30 MHz
- 50 VOLTS
- IMD = -30 dB
- P_{OUT} = 150 WATTS
- G_P = 14 dB MINIMUM
- COMMON EMITTER CONFIGURATION

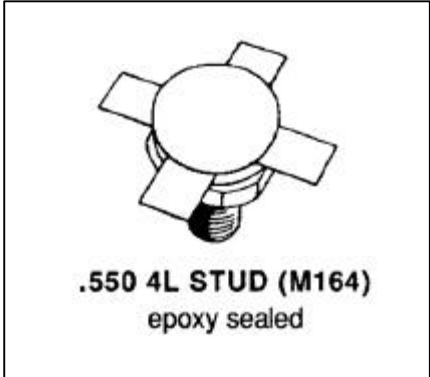

DESCRIPTION:

The MS1008 is a 50V epitaxial silicon NPN planar transistor designed primarily for SSB communications. This device utilizes emitter ballasting to achieve extreme ruggedness under severe operating conditions.

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	110	V
V _{CEO}	Collector-Emitter Voltage	55	V
V _{EBO}	Emitter-Base Voltage	4.0	V
I _C	Device Current	10	A
P _{DISS}	Power Dissipation	233	W
T _J	Junction Temperature	+200	°C
T _{STG}	Storage Temperature	-65 to +150	°C

Thermal Data

R _{TH(J-C)}	Junction-Case Thermal Resistance	0.75	°C/W
----------------------	----------------------------------	------	------

**ELECTRICAL SPECIFICATIONS (T_{case} = 25°C)
STATIC**


Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV_{CBO}	I_C = 100mA	I_E = 0mA	110	---	---	V
BV_{CES}	I_C = 100mA	V_{BE} = 0V	110	---	---	V
BV_{CEO}	I_C = 100mA	I_B = 0mA	55	---	---	V
BV_{EBO}	I_E = 10mA	I_C = 0mA	4.0	---	---	V
I_{CEO}	V_{CE} = 30V	I_E = 0 mA	---	---	5	mA
I_{CES}	V_{CE} = 60V	I_E = 0mA	---	---	5	mA
h_{FE}	V_{CE} = 6V	I_C = 1.4A	18	---	43.5	---

DYNAMIC


Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
P_{OUT}	f = 30 MHz	V_{CE} = 50V	I_{CQ} = 100mA	150	---	---	WPEP
G_P	P_{OUT} = 150WPEP	V_{CE} = 50V	I_{CQ} = 100mA	14	---	---	dB
IMD	P_{OUT} = 150WPEP	V_{CE} = 50V	I_{CQ} = 100mA	---		-30	dBc
η_C	P_{OUT} = 150WPEP	V_{CE} = 50V	I_{CQ} = 100mA	37	---	---	%
C_{OB}	f = 1 MHz	V_{CB} = 50 V		---	---	220	pF

Conditions: f₁ = 30.000MHz f₂ = 30.001MHz

TYPICAL PERFORMANCE

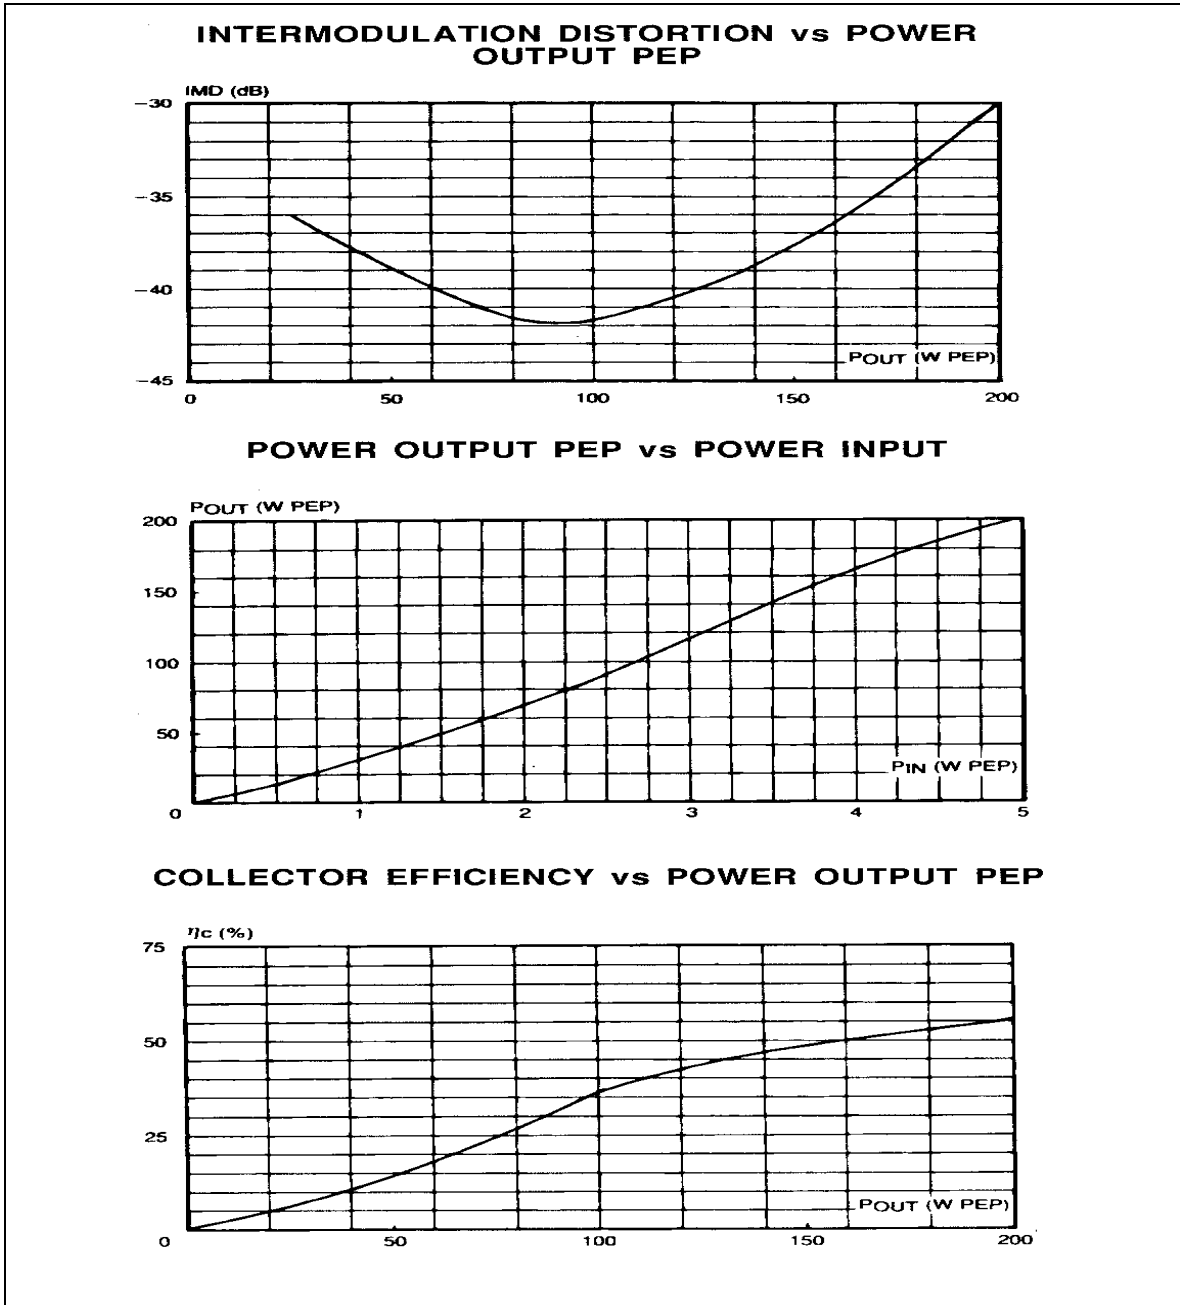


TYPICAL PERFORMANCE

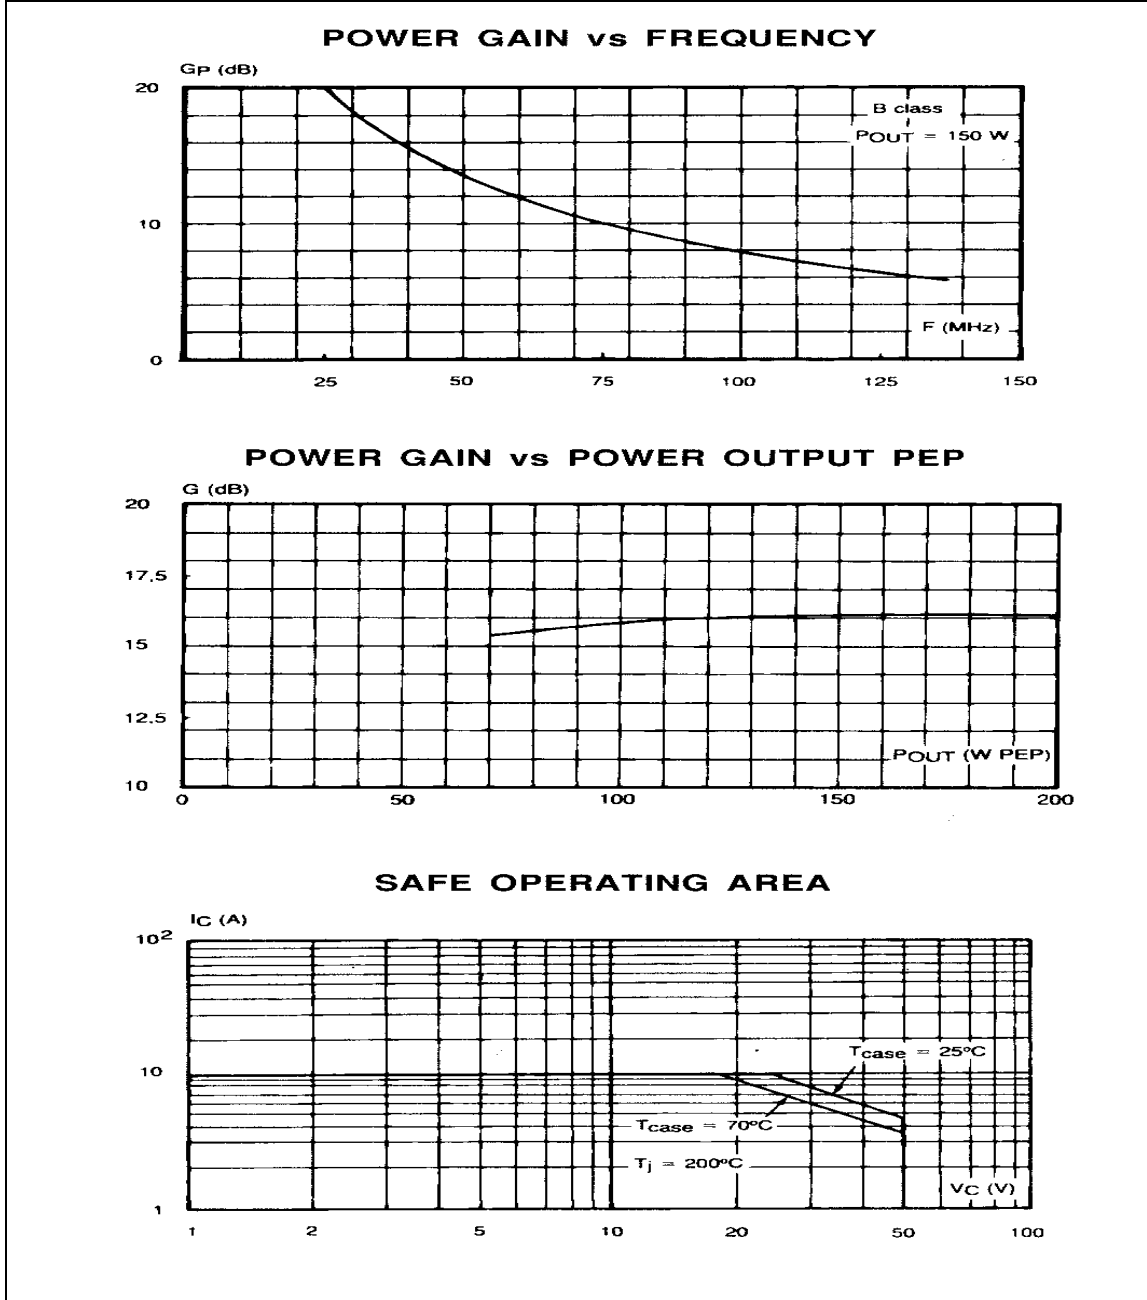

MS1008

PACKAGE MECHANICAL DATA

PACKAGE STYLE M164

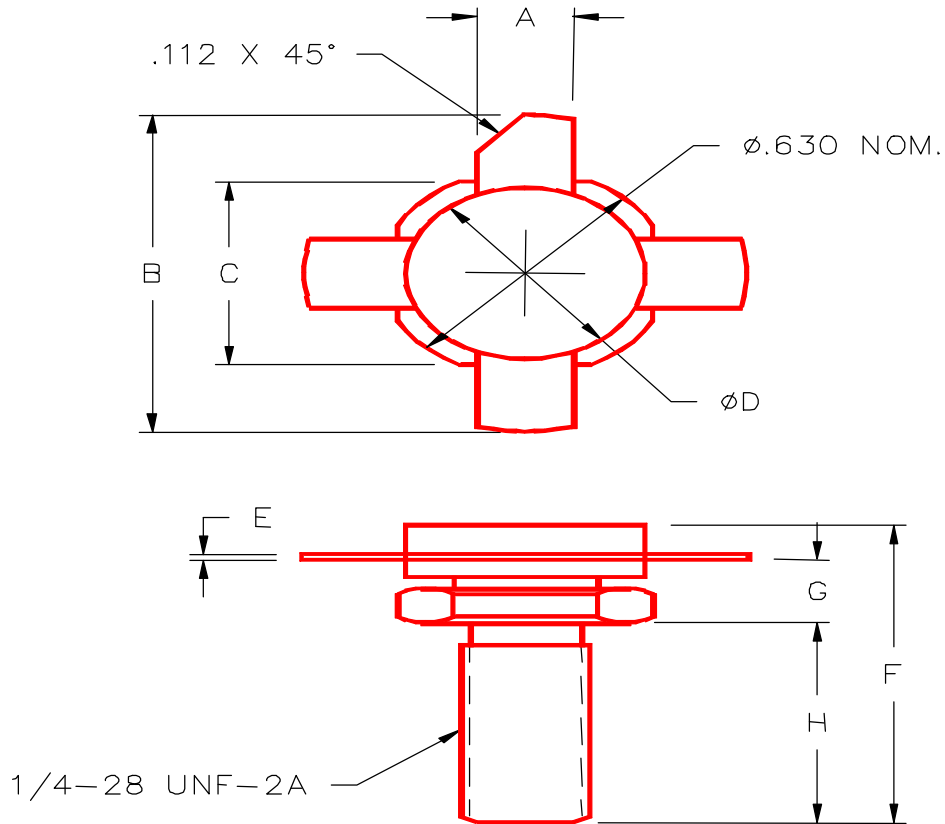

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM		MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	.220/5,59	.230/5,84			
B		1.050/26,67			
C	.545/13,84	.555/14,10			
D	.495/12,57	.505/12,83			
E	.003/0,08	.007/0,18			
F		.810/20,57			
G	.185/4,70	.198/5,03			
H	.497/12,62	.530/13,46			